




## DOUBLE PALLET HANDLER

This double pallet handler allows single or double pallet loads to be moved safely and quickly. The high visibility of the open design maintains maximum view through the frame for greater safety and productivity.

This model has been developed for the fast and reliable handling of Australian pallets and incorporates many features that minimise maintenance times and costs. See page D2 for details.

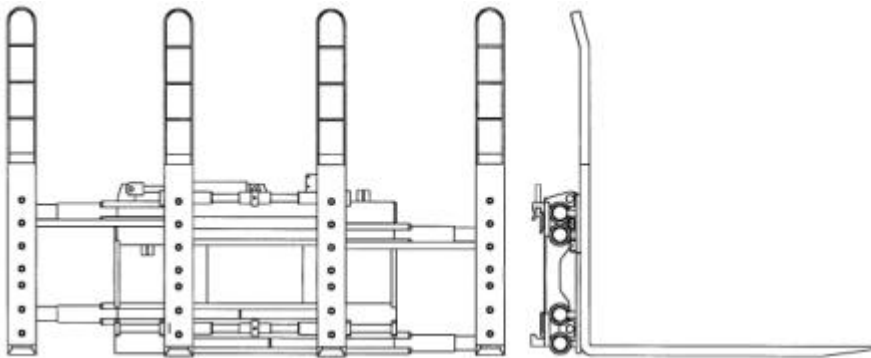

### Features:

- ✓ Excellent visibility
- ✓ Bolt-on forks for quick and low cost replacement
- ✓ Larger opening range and wider forks to handle Australian pallets securely
- ✓ Cylinders protected inside the frame, but easily accessible for maintenance.
- ✓ Extra bracing of frame to minimise twisting in rough applications
- ✓ Wear parts and lubrication points easily accessible for maintenance.
- ✓ Integral sideshift

### Options:

- ? Other multi-pallet handlers, 1-2-3 or 2-4 or 4-6
- ? Carriage-mounted pantographs for loading trucks from one side.
- ? Higher capacities available

Model	Cap. @ 600 mm	Mount	Opening Range	Body Width	Fork Section W x T x L	LL	HCG	Weight
	kg							
DPS DA3 025 130	2500	III	780-2080	1300	120x40x1100	165	250	580

Notes:-

1. Opening range is given as out to out of forks.
2. Class II mounting is available.
3. Maximum hydraulic supply pressure is 17 MPa
4. Recommended hydraulic supply flow rate is between 20 and 30 litres/min.

## Sattach Pty Ltd

305 Hanson Road  
Wingfield, South Australia, 5013  
ABN 78 010 459 613

Telephone: +61 8 8268 4111  
Facsimile: +61 8 8268 4611  
Email: [sales@sattach.com.au](mailto:sales@sattach.com.au)

### D1

Branches:

NSW: 0416 244 355  
VIC: 0419 871 847  
QLD: 0417 766 521  
WA: 0407 148 879

MAR 04